

PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

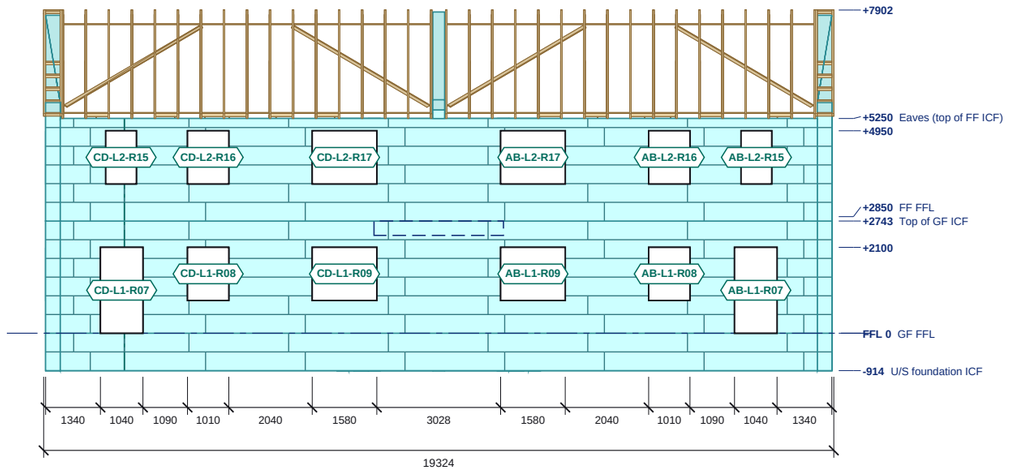

NORTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

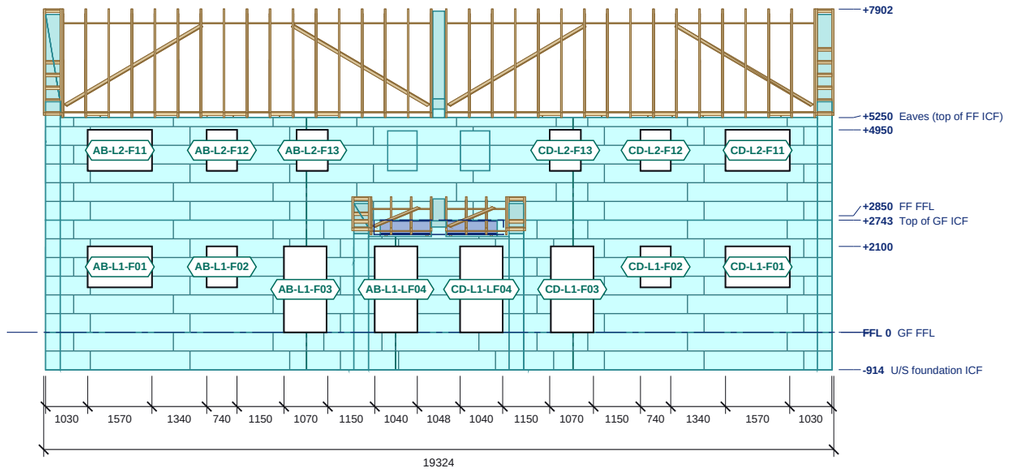

SOUTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint
Steel

0 1 2 3 4 5 6 7 8m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

NORTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
AB-L1-R07	1040	2100	0	+2100	-
AB-L1-R08	1010	1300	+800	+2100	-
AB-L1-R09	1580	1300	+800	+2100	-
AB-L2-R15	750	1300	+3650	+4950	-
AB-L2-R16	1010	1300	+3650	+4950	-
AB-L2-R17	1580	1300	+3650	+4950	-
CD-L1-R07	1040	2100	0	+2100	-
CD-L1-R08	1010	1300	+800	+2100	-
CD-L1-R09	1580	1300	+800	+2100	-
CD-L2-R15	750	1300	+3650	+4950	-
CD-L2-R16	1010	1300	+3650	+4950	-
CD-L2-R17	1580	1300	+3650	+4950	-

Structural openings in the ICF; sill and head above GF FFL.

SOUTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
AB-L1-F01	1570	1000	+1100	+2100	-
AB-L1-F02	740	1000	+1100	+2100	-
AB-L1-F03	1040	2100	0	+2100	-
AB-L1-LF04	1040	2100	0	+2100	-
AB-L2-F11	1570	1000	+3950	+4950	-
AB-L2-F12	740	1000	+3950	+4950	-
AB-L2-F13	760	1000	+3950	+4950	-
CD-L1-F01	1570	1000	+1100	+2100	-
CD-L1-F02	740	1000	+1100	+2100	-
CD-L1-F03	1040	2100	0	+2100	-
CD-L1-LF04	1040	2100	0	+2100	-
CD-L2-F11	1570	1000	+3950	+4950	-
CD-L2-F12	740	1000	+3950	+4950	-
CD-L2-F13	760	1000	+3950	+4950	-

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
top of ICF	+2100
Top of GF ICF	+2743
FF FFL	+2850
top of ICF	+4950
Eaves (top of FF ICF)	+5250
top of roof build-up	+7902

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel shown as modelled.
4. See ES26-081-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE

NORTH AND SOUTH ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-EL-01	Q01