

PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price.
All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

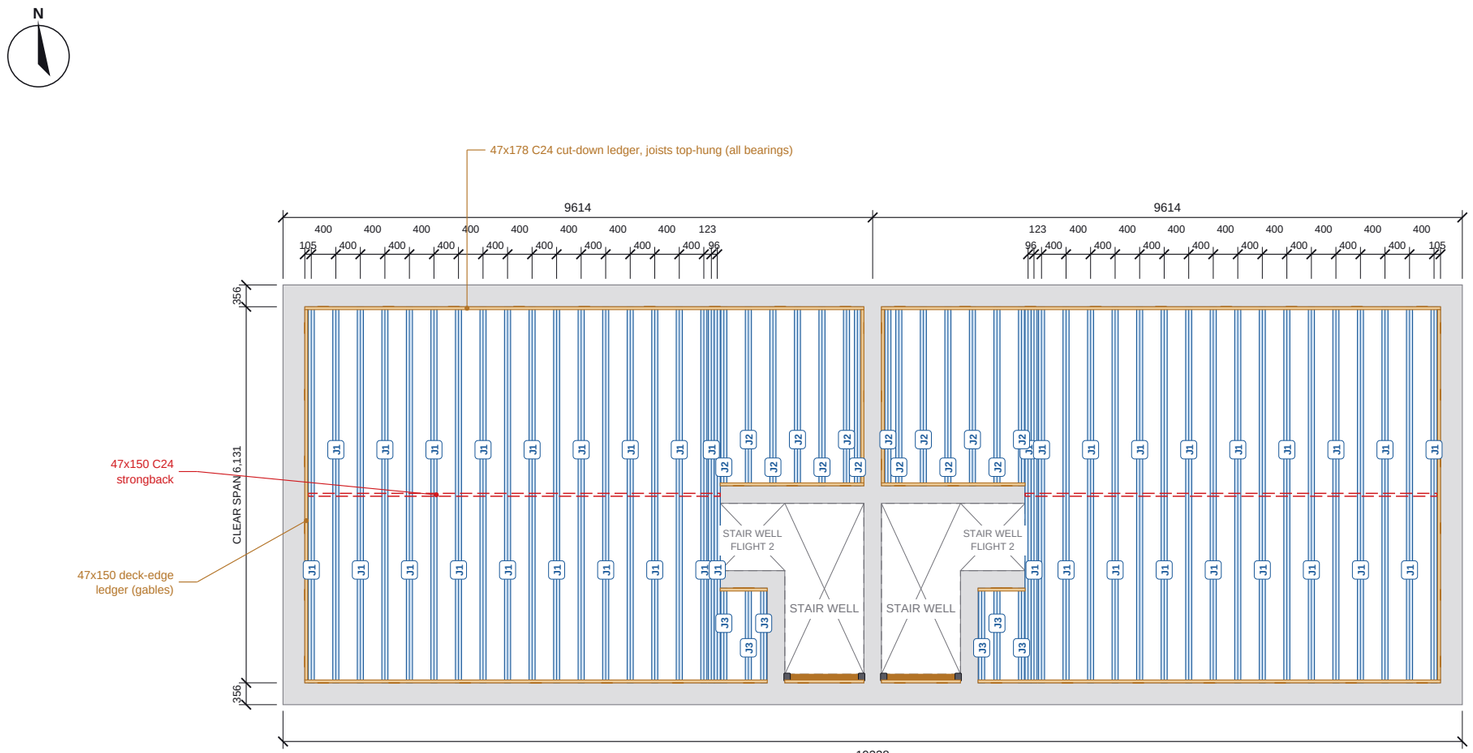

FIRST FLOOR JOIST LAYOUT

Scale 1:100 @ A3 | Plan on the FF joists, deck omitted

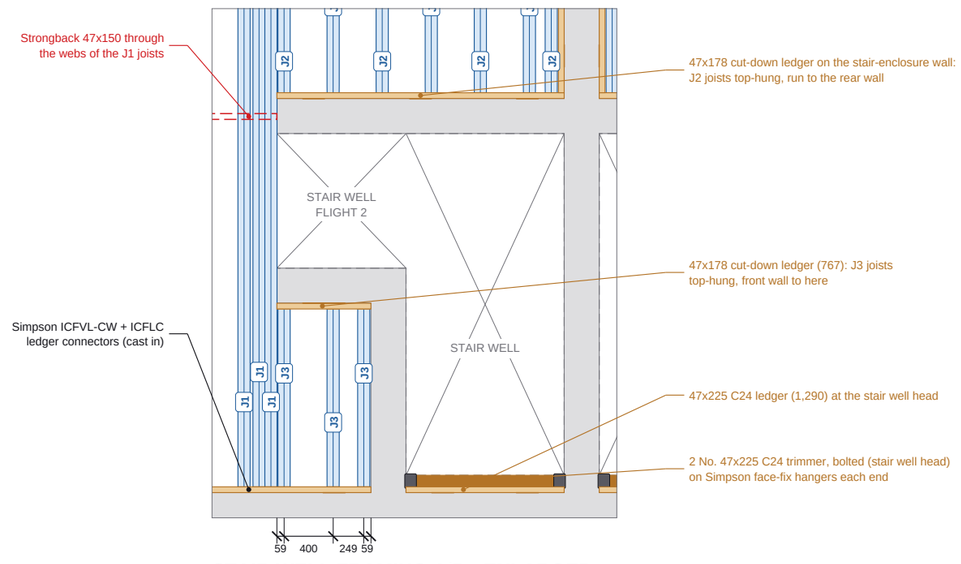

STAIR WELL FRAMING A/B - ENLARGED

Scale 1:50 | C/D handed (mirror)

Metal-web joist 253 (type J)
C24 ledger
Strongback
Connector / hanger / clip
ICF walls (FF outline)

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

FIRST FLOOR SCHEDULES

JOIST SCHEDULE (253 DEEP, @400)

Type	O/A	Bottom	A/B	C/D	Total
J1	6,125	6,031	19	19	38
J2	2,913	2,819	7	7	14
J3	1,538	1,444	3	3	6
	Total		**29**	**29**	**58**

O/A = top flange overall length; Bottom = bottom flange length. Profiles on ES26-081-FL-02.

LEDGERS, STRONGBACKS, TRIMMERS (C24)

Item	Length	Qty
2 No. 47x225 trimmer, bolted	1,284	2
47x150 deck-edge ledger	6,037	2
47x150 deck-edge ledger	2,825	2
47x150 strongback	6,716	2
47x178 ledger cut-down ledger	9,116	2
47x178 ledger cut-down ledger	7,540	2
47x178 ledger cut-down ledger	2,342	2
47x178 ledger cut-down ledger	767	2
47x225 ledger	1,290	2

METALWORK AND DECK

Item	Qty
22 Egger Protect P5 T&G board	92
Face-fix trimmer hanger	4
Strong-Tie ICFVL-CW + ICFLC connector	64
Top-chord restraint clip (galv)	116

NOTES

1. First floor: 253 deep metal-web joists (PS10 / Posi-Joist / Easi-Joist equivalent, 97 x 47 C24 flanges) at 400 c/c, TOP-HUNG: the top flange runs over a 47 x 178 C24 ledger (47 x 225 ripped down) and stops 3 short of the ICF face; the bottom flange stops 3 short of the ledger. Galv restraint clip at every bearing.
2. Ledgers fixed to the ICF with cast-in Simpson Strong-Tie ICFVL-CW + ICFLC connectors (spacing to the connector manufacturer's table). Top of ledger +2,781, top of joists +2,828 above GF FFL.
3. Deck: 22 Egger Protect P5 T&G, glued and screwed to every joist, laid across the joists.
4. 47 x 150 C24 strongback through the webs at mid-span of the long joists, fixed to the vertical web plates. Stair well head: 2 No. 47 x 225 C24 trimmer bolted, on face-fix hangers.
5. Joist supplier to design and confirm joist depth, spacing, bracing and ledger fixings; layout for pricing only.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE
FIRST FLOOR LAYOUT
Metal-web joists, ledgers, strongbacks, stair well trimmers

SCALE	SIZE	DATE
1:100	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-FL-01	Q01