
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

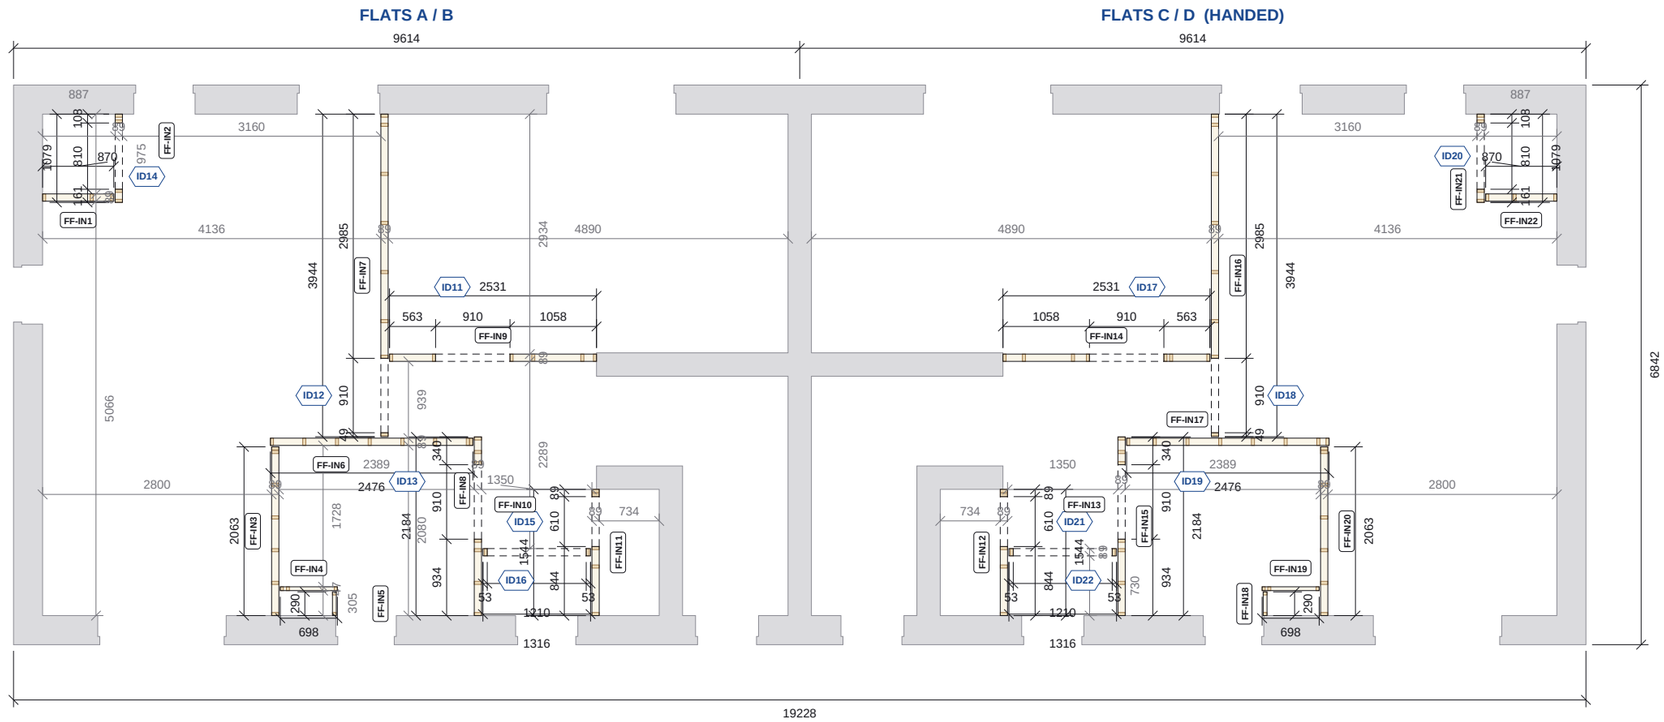

FIRST FLOOR TIMBER PARTITIONS PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above floor level

Partition panel, studs cut at plan level | Panel joint | Nudura ICF shell (context only) | Door opening, head over

0 1 2 3 4 5m

QUOTATION - NOT FOR CONSTRUCTION

Do not scale. All dimensions in mm. Check all dimensions on site.

FIRST FLOOR SCHEDULES

PARTITION SCHEDULE

Panel	Flat	Studs	Use	Length	Doors
FF-IN1	A/B	38x89 C16 @600	partition	870	-
FF-IN2	A/B	38x89 C16 @600	partition	1079	ID14
FF-IN3	A/B	38x89 C16 @400	bathroom	2063	-
FF-IN4	A/B	38x47 C16 @600	riser box	698	-
FF-IN5	A/B	38x47 C16 @600	riser box	290	-
FF-IN6	A/B	38x89 C16 @400	bathroom	2476	-
FF-IN7	A/B	38x89 C16 @600	partition	3944	ID12
FF-IN8	A/B	38x89 C16 @400	bathroom	2184	ID13
FF-IN9	A/B	38x89 C16 @600	partition	2531	ID11
FF-IN10	A/B	38x89 C16 @600	partition	1316	ID16
FF-IN11	A/B	38x89 C16 @600	partition	1544	ID15
FF-IN12	C/D	38x89 C16 @600	partition	1544	ID21
FF-IN13	C/D	38x89 C16 @600	partition	1316	ID22
FF-IN14	C/D	38x89 C16 @600	partition	2531	ID17
FF-IN15	C/D	38x89 C16 @400	bathroom	2184	ID19
FF-IN16	C/D	38x89 C16 @600	partition	3944	ID18
FF-IN17	C/D	38x89 C16 @400	bathroom	2476	-
FF-IN18	C/D	38x47 C16 @600	riser box	290	-
FF-IN19	C/D	38x47 C16 @600	riser box	698	-
FF-IN20	C/D	38x89 C16 @400	bathroom	2063	-
FF-IN21	C/D	38x89 C16 @600	partition	1079	ID20
FF-IN22	C/D	38x89 C16 @600	partition	870	-

Length = panel length along the wall (mm). Head and bottom rails as the studs. Bathroom walls at 400 centres for pattressing; riser boxing 38x47.

DOOR OPENING SCHEDULE

Label	Width	Height	Head
ID11	910	2100	2100
ID12	910	2100	2100
ID13	910	2100	2100
ID14	810	2100	2100
ID15	610	2100	2100
ID16	1210	2100	2100

Label	Width	Height	Head
ID17	910	2100	2100
ID18	910	2100	2100
ID19	910	2100	2100
ID20	810	2100	2100
ID21	610	2100	2100
ID22	1210	2100	2100

Structural opening sizes. Head level above underside of the bottom rail.

PARTITION TIMBER (THIS FLOOR, BOTH FLATS)

Section	Pieces	Run m	4.8m lengths
38x89 C16	283	353.5	78
38x47 C16	24	29.2	7

Studs, rails and noggins from the model. Order lengths = run / 4.8m +5%, not cut-optimised.

NOTES

1. Internal partitions only, non-load-bearing: 38x89 C16 studs at 600 centres with 38x89 C16 head and bottom rails; bathroom walls 38x89 C16 at 400 centres for pattressing; service riser boxing 38x47 C16 at 600. Panel marks refer to the partition schedule.
2. External, party and core walls are Nudura ICF (grey), shown for context only: read with the ICF drawings. Partitions are set out from the ICF internal face and adjacent partitions (grey set-out strings).
3. Door openings are structural opening sizes. Head level above underside of the bottom rail.
4. Both flats shown; C/D is handed from A/B. Dimensions to timber frame faces. Check all dimensions on site.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

TLS TIMBER FRAME
Design & Manufacture

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE

FIRST FLOOR TIMBER PARTITIONS

Internal stud partitions, panels and door openings

SCALE	SIZE	DATE	DRAWN
1:75	A3	16.10.26	TS

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-TF-02	Q01