

QUOTATION - NOT FOR CONSTRUCTION

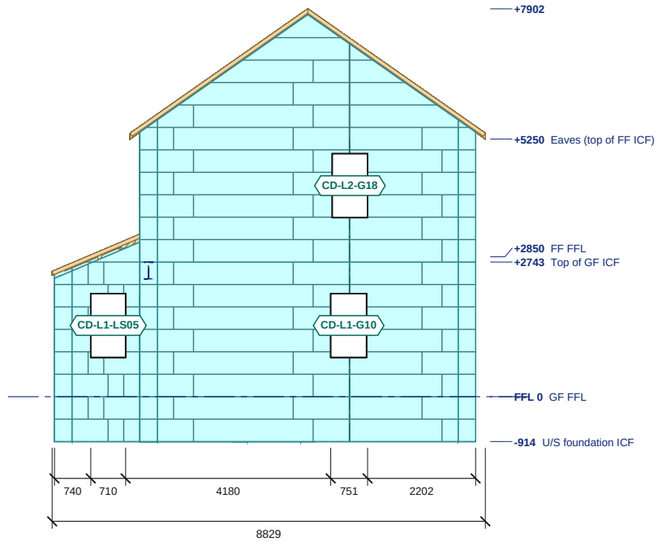

EAST ELEVATION

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

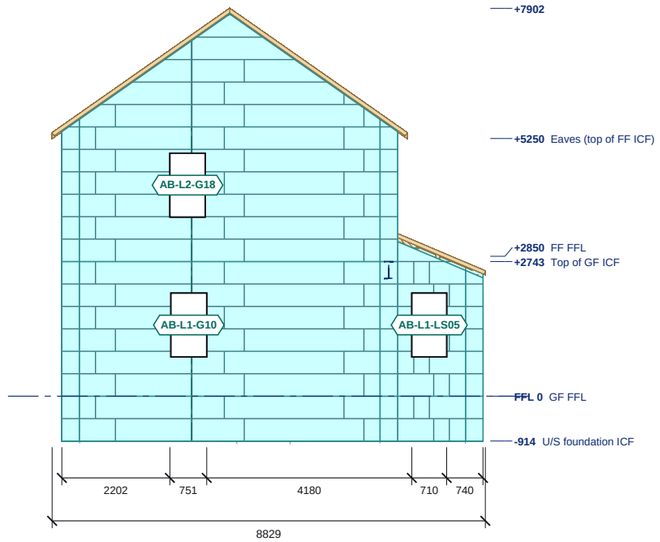

WEST ELEVATION

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4 5m

ICF external EPS face
Block course joint
Stack joint
Steel

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

EAST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
CD-L1-G10	730	1300	+800	+2100	-
CD-L1-LS05	710	1300	+800	+2100	-
CD-L2-G18	720	1300	+3650	+4950	-

Structural openings in the ICF; sill and head above GF FFL.

WEST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
AB-L1-G10	730	1300	+800	+2100	-
AB-L1-LS05	710	1300	+800	+2100	-
AB-L2-G18	720	1300	+3650	+4950	-

Structural openings in the ICF; sill and head above GF FFL.

EAST ELEVATION: LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
Top of GF ICF	+2743
FF FFL	+2850
Eaves (top of FF ICF)	+5250
top of roof build-up	+7902

WEST ELEVATION: LEVELS

Level	FFL
U/S foundation ICF	-914
GF FFL	0
Top of GF ICF	+2743
FF FFL	+2850
Eaves (top of FF ICF)	+5250
top of roof build-up	+7902

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel shown as modelled.
4. See ES26-081-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE

EAST AND WEST ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:125	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-EL-02	Q01