
QUOTATION - NOT FOR CONSTRUCTION

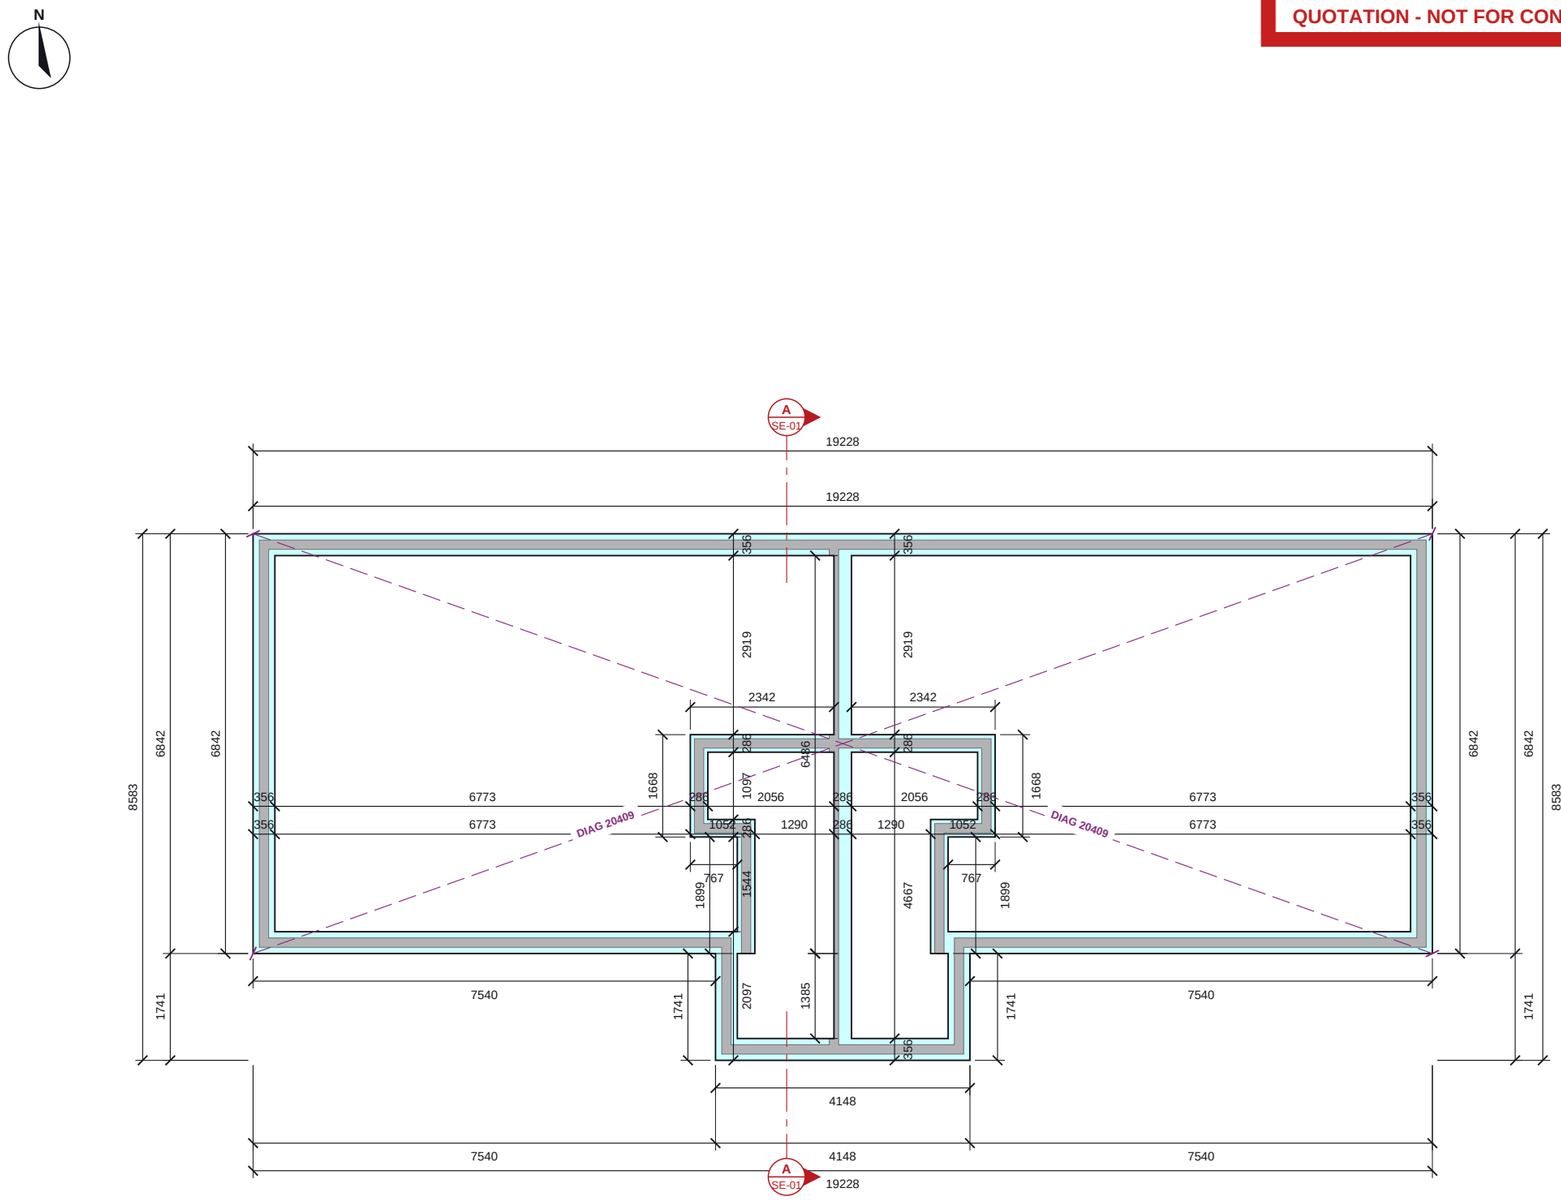

EPS insulation (Nudura form)
Concrete core
End cap at opening
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

FOOTING ICF PLAN

Scale 1:100 @ A3 | Plan cut at -457

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FOOTING ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation model: 6in XR35 external walls, 6in Standard party and stair-enclosure walls. The porch steel (UKB 356x171x45 S355 under the first-floor front wall) is TLS-proposed for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE

FOOTING ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:100	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-GA-01	Q01