

QUOTATION - NOT FOR CONSTRUCTION

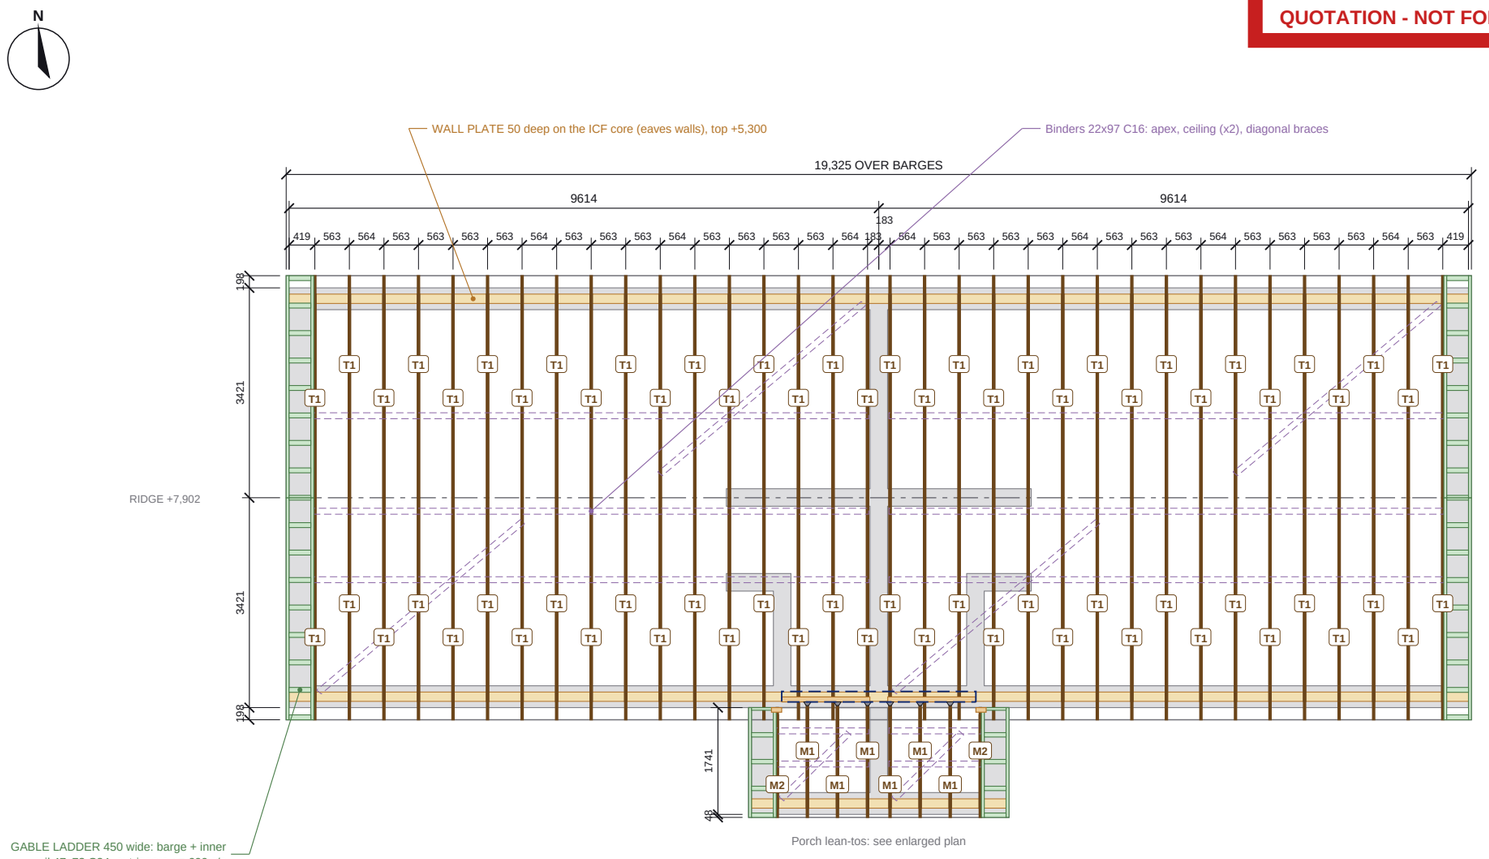


ROOF TRUSS LAYOUT

Scale 1:100 @ A3 | Plan on the roof structure

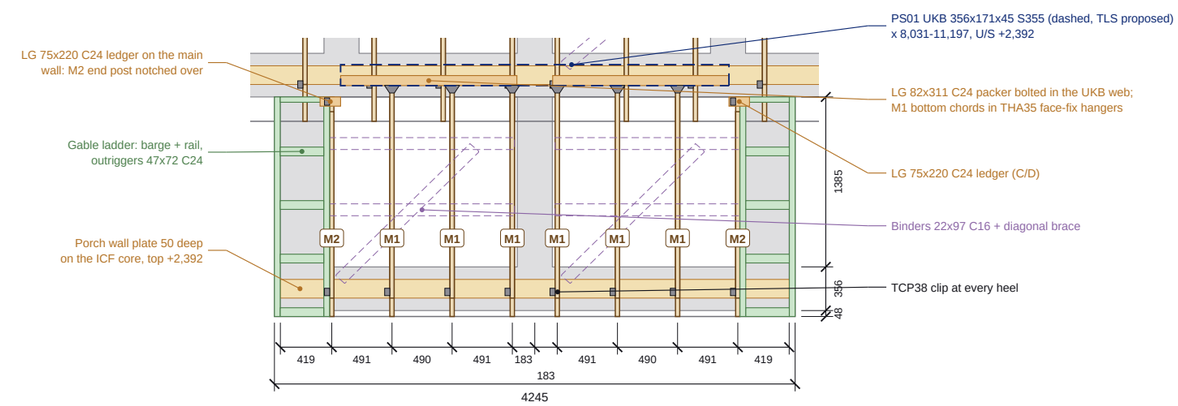

PORCH LEAN-TOS - ENLARGED PLAN

Scale 1:50 | Trusses M1 / M2, steel PS01

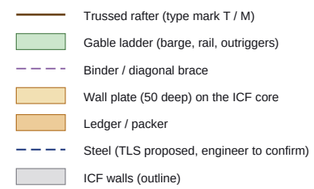



ROOF STRUCTURE SCHEDULES

TRUSS SCHEDULE

Type	Description	Bottom chord	Top chord	Qty
T1	Fink (W) 35 deg, duo-pitch	6,639	35x97 TR26	34
M1	Mono, hung on steel PS01	1,732	35x72 TR26	6
M2	Mono, end truss on ledger	1,519	35x72 TR26	2
	Total trusses			**42**

Profiles, spans, rise and member sizes on ES26-081-RF-02.

LOOSE ROOF TIMBER

Item	Section	Length	Qty
Barge (gable ladder outer rail)	47x72 C24	4,418	4
Barge (gable ladder outer rail)	47x72 C24	1,944	2
Binder / diagonal brace	22x97 C16	9,047	6
Binder / diagonal brace	22x97 C16	4,732	4
Binder / diagonal brace	22x97 C16	1,594	2
Binder / diagonal brace	22x97 C16	1,507	4
Gable ladder inner rail	47x72 C24	4,418	4
Gable ladder inner rail	47x72 C24	1,944	2
Ladder outrigger	47x72 C24	355	46
Ledger	75x220 C24	167	2
Packer in UKB web	82x311 C24	1,437	2

ROOF METALWORK

Item	Qty
Gable restraint strap 30 x 5 (HES)	14
Truss clip to plate / ledger (TCP38)	78
Face-fix truss hanger on packer (THA35)	6

STEEL

Mark	Section	Length	U/S
PS01	UKB 356x171x45 S355	3,166	+2,392

TLS proposed, for the engineer's review. U/S = underside above GF FFL.

NOTES

1. Roof trusses, gable ladders, binders and metalwork as modelled for the quotation (TLS roof framer). The truss manufacturer designs the trusses and the bracing to BS EN 1995-1-1 / BS 5268-3 and confirms the spacing, member sizes and metalwork; this layout is for pricing only.
2. Main roofs: 17 No. Fink trusses per roof at 563 c/c (<= 600), 35 deg, on a 50 deep timber wall plate bedded on the ICF core of the front and rear walls, plate top +5,300 above GF FFL. Gable ends: 450 wide gable ladders (barge + inner rail + outriggers <= 600 c/c), HES restraint straps <= 2 m c/c.
3. Porch lean-tos: mono-pitch trusses at 491 c/c. Low end on a 50 wall plate on the porch ICF wall (plate top +2,392). High end: bottom chords in face-fixed truss hangers (THA35) on an 82 x 311 C24 timber packer bolted in the web of steel PS01; the end truss each side sits on a 75 x 220 C24 ledger (end post notched over it) resin-anchored to the main front wall.
4. Steel PS01 (UKB 356x171x45 S355) is TLS-proposed for the engineer's review: shown dashed, underside +2,392.
5. Truss clips TCP38 at every bearing. All levels above GF FFL. Dimensions in mm.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE

ROOF TRUSS LAYOUT

Main roof + porch lean-to trusses, gable ladders, binders, steel

SCALE	SIZE	DATE
1:100	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-RF-01	Q01

Do not scale. All dimensions in mm. Check all dimensions on site.