
QUOTATION - NOT FOR CONSTRUCTION

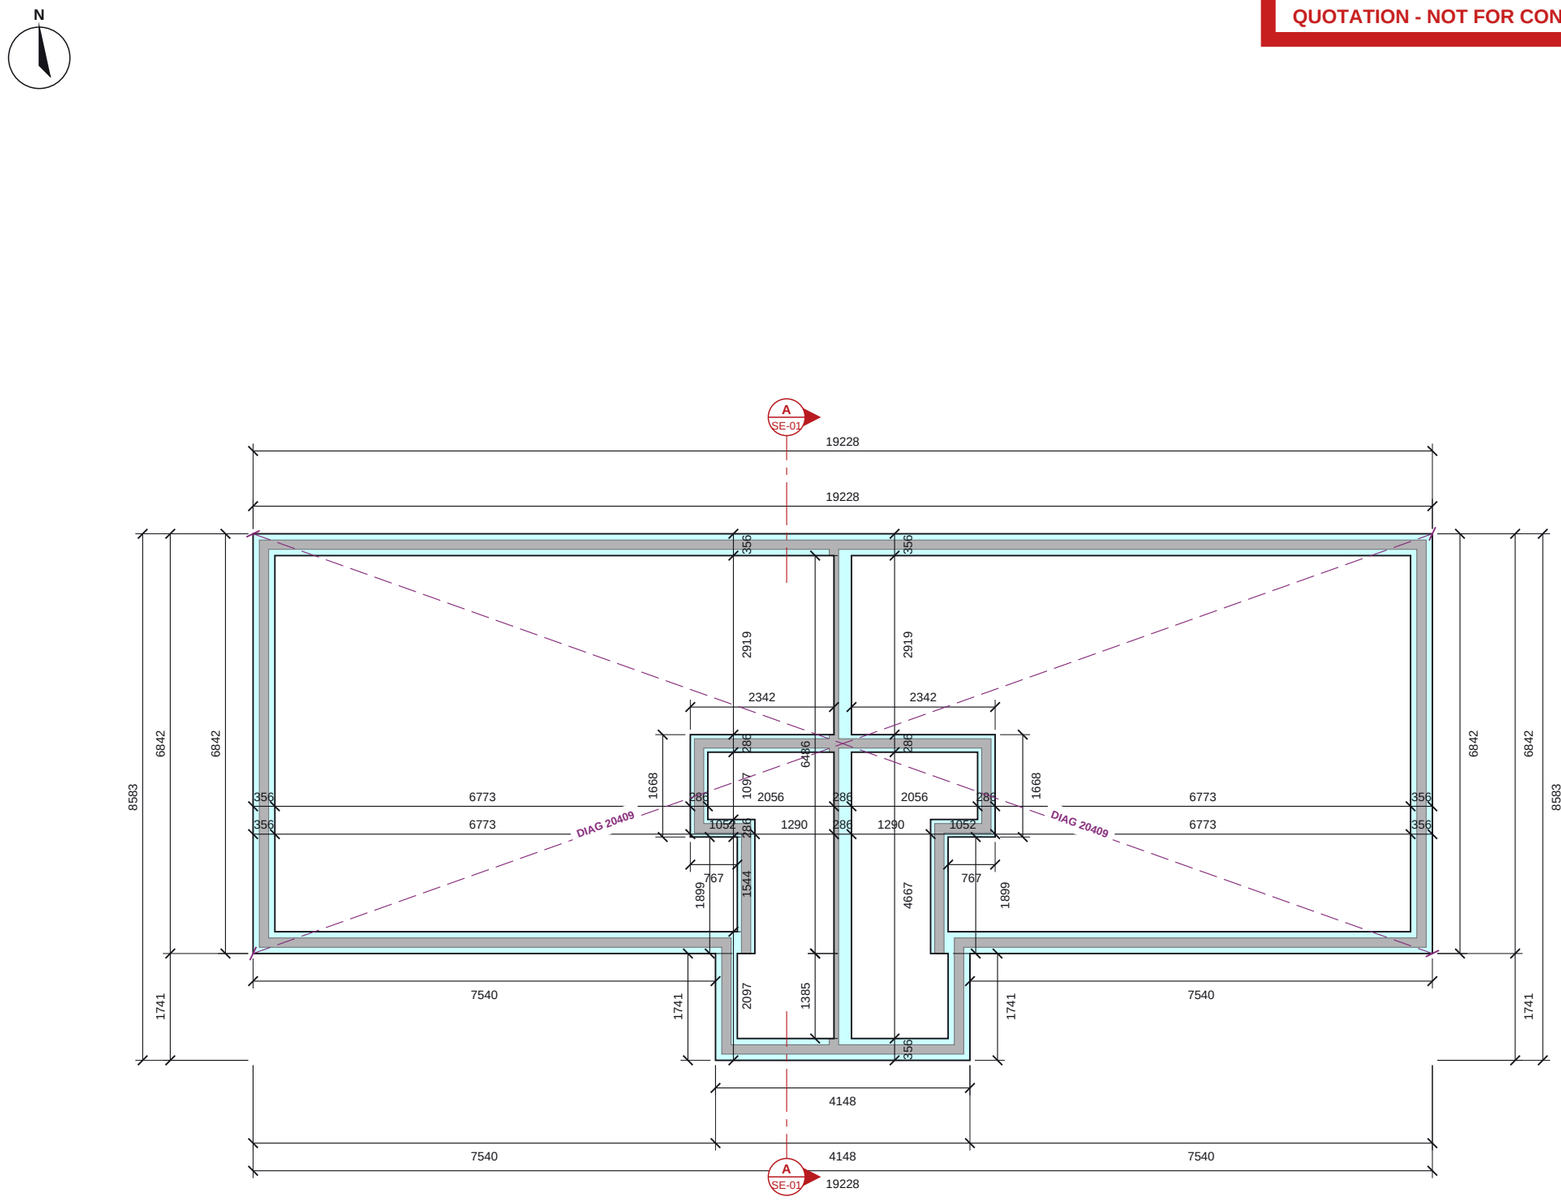


EPS insulation (Nudura form)
Concrete core
End cap at opening
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

## FOOTING ICF PLAN

Scale 1:100 @ A3 | Plan cut at -457

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

## FOOTING ICF SCHEDULES

### OPENING SCHEDULE

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| none | | | | | |

Structural openings in the ICF; sill and head above GF FFL.

### NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists yet. ICF per the quotation model: 6in XR35 external walls, 6in Standard party and stair-enclosure walls. The porch steel (UKB 356x171x45 S355 under the first-floor front wall) is TLS-proposed for the engineer's review.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| Q01 | 16.10.26 | First issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| Beech Developments | Lon Eilian, Caernarfon |

DRAWING TITLE

**FOOTING ICF GENERAL ARRANGEMENT**

ICF walls, openings, lintels, steel over and engineer's notes

| SCALE | SIZE | DATE |
|---|---|---|
| 1:100 | A3 | 16.10.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| QUOTATION | ES26-081-GA-01 | Q01 |