
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

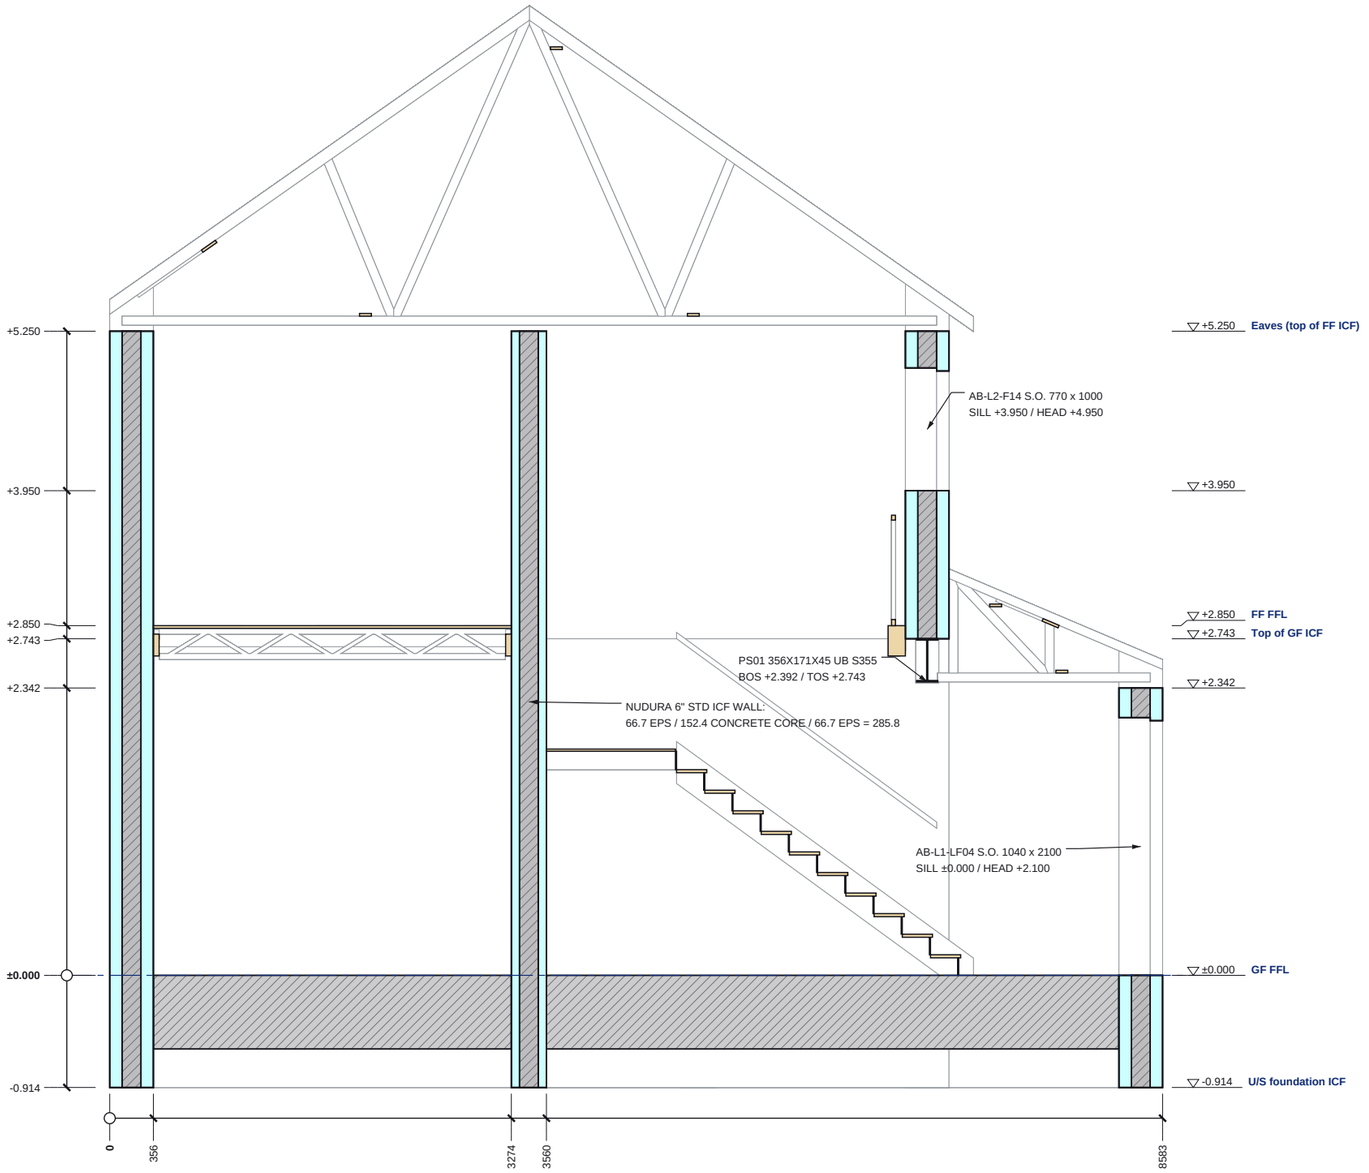

SECTION A-A

Scale 1:50 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION A-A SCHEDULES


LEVELS ON THIS SECTION

Level	FFL
U/S foundation ICF	-0.914
GF FFL	±0.000
top of ICF W06	+2.342
Top of GF ICF	+2.743
FF FFL	+2.850
top of ICF W04	+3.950
Eaves (top of FF ICF)	+5.250

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
PS01	356x171x45 UB S355	+2.392	+2.743

SECTION KEY

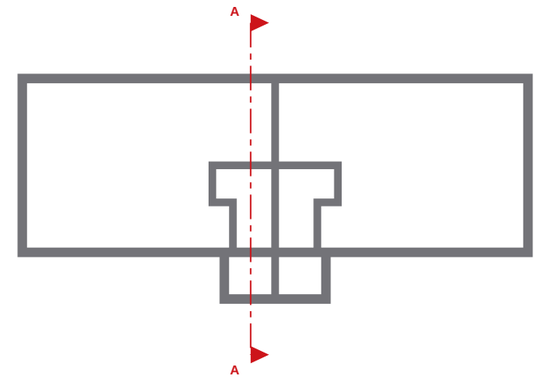

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. No structural design exists yet. ICF per the quotation model: 6in XR35 external walls, 6in Standard party and stair-enclosure walls. The porch steel (UKB 356x171x45 S355 under the first-floor front wall) is TLS-proposed for the engineer's review.
4. Steel marks, BOS / TOS: rev -. See ES26-081-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE
SECTION A-A

ICF section with levels and build-ups

SCALE	SIZE	DATE
1:50	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-SE-01	Q01