
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

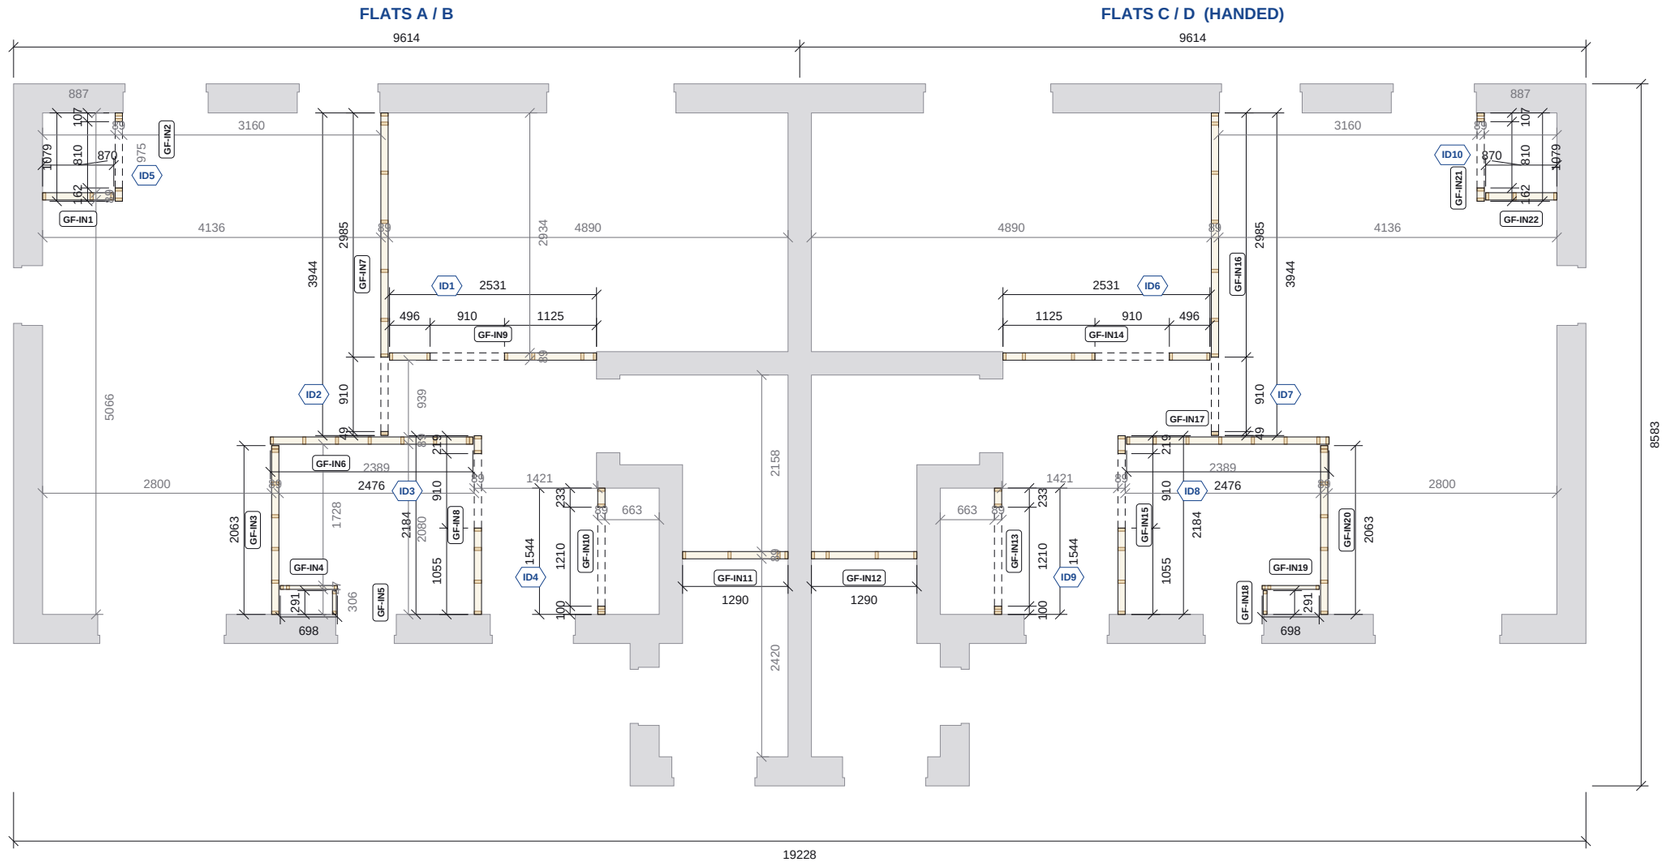

GROUND FLOOR TIMBER PARTITIONS PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above floor level

Partition panel, studs cut at plan level | Panel joint | Nudura ICF shell (context only) | Door opening, head over

QUOTATION - NOT FOR CONSTRUCTION

Do not scale. All dimensions in mm. Check all dimensions on site.

GROUND FLOOR SCHEDULES

PARTITION SCHEDULE

Panel	Flat	Studs	Use	Length	Doors
GF-IN1	A/B	38x89 C16 @600	partition	870	-
GF-IN2	A/B	38x89 C16 @600	partition	1079	ID5
GF-IN3	A/B	38x89 C16 @400	bathroom	2063	-
GF-IN4	A/B	38x47 C16 @600	riser box	698	-
GF-IN5	A/B	38x47 C16 @600	riser box	291	-
GF-IN6	A/B	38x89 C16 @400	bathroom	2476	-
GF-IN7	A/B	38x89 C16 @600	partition	3944	ID2
GF-IN8	A/B	38x89 C16 @400	bathroom	2184	ID3
GF-IN9	A/B	38x89 C16 @600	partition	2531	ID1
GF-IN10	A/B	38x89 C16 @600	partition	1544	ID4
GF-IN11	A/B	38x89 C16 @600	partition	1290	-
GF-IN12	C/D	38x89 C16 @600	partition	1290	-
GF-IN13	C/D	38x89 C16 @600	partition	1544	ID9
GF-IN14	C/D	38x89 C16 @600	partition	2531	ID6
GF-IN15	C/D	38x89 C16 @400	bathroom	2184	ID8
GF-IN16	C/D	38x89 C16 @600	partition	3944	ID7
GF-IN17	C/D	38x89 C16 @400	bathroom	2476	-
GF-IN18	C/D	38x47 C16 @600	riser box	291	-
GF-IN19	C/D	38x47 C16 @600	riser box	698	-
GF-IN20	C/D	38x89 C16 @400	bathroom	2063	-
GF-IN21	C/D	38x89 C16 @600	partition	1079	ID10
GF-IN22	C/D	38x89 C16 @600	partition	870	-

Length = panel length along the wall (mm). Head and bottom rails as the studs. Bathroom walls at 400 centres for pattressing; riser boxing 38x47.

DOOR OPENING SCHEDULE

Label	Width	Height	Head
ID1	910	2100	2100
ID2	910	2100	2100
ID3	910	2100	2100
ID4	1210	2100	2100
ID5	810	2100	2100

Label	Width	Height	Head
ID6	910	2100	2100
ID7	910	2100	2100
ID8	910	2100	2100
ID9	1210	2100	2100
ID10	810	2100	2100

Structural opening sizes. Head level above underside of the bottom rail.

PARTITION TIMBER (THIS FLOOR, BOTH FLATS)

Section	Pieces	Run m	4.8m lengths
38x89 C16	273	367.1	81
38x47 C16	24	30.5	7

Studs, rails and noggins from the model. Order lengths = run / 4.8m +5%, not cut-optimised.

NOTES

1. Internal partitions only, non-load-bearing: 38x89 C16 studs at 600 centres with 38x89 C16 head and bottom rails; bathroom walls 38x89 C16 at 400 centres for pattressing; service riser boxing 38x47 C16 at 600. Panel marks refer to the partition schedule.
2. External, party and core walls are Nudura ICF (grey), shown for context only: read with the ICF drawings. Partitions are set out from the ICF internal face and adjacent partitions (grey set-out strings).
3. Door openings are structural opening sizes. Head level above underside of the bottom rail.
4. Both flats shown; C/D is handed from A/B. Dimensions to timber frame faces. Check all dimensions on site.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE

GROUND FLOOR TIMBER PARTITIONS

Internal stud partitions, panels and door openings

SCALE	SIZE	DATE
1:75	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-TF-01	Q01