
QUOTATION - NOT FOR CONSTRUCTION

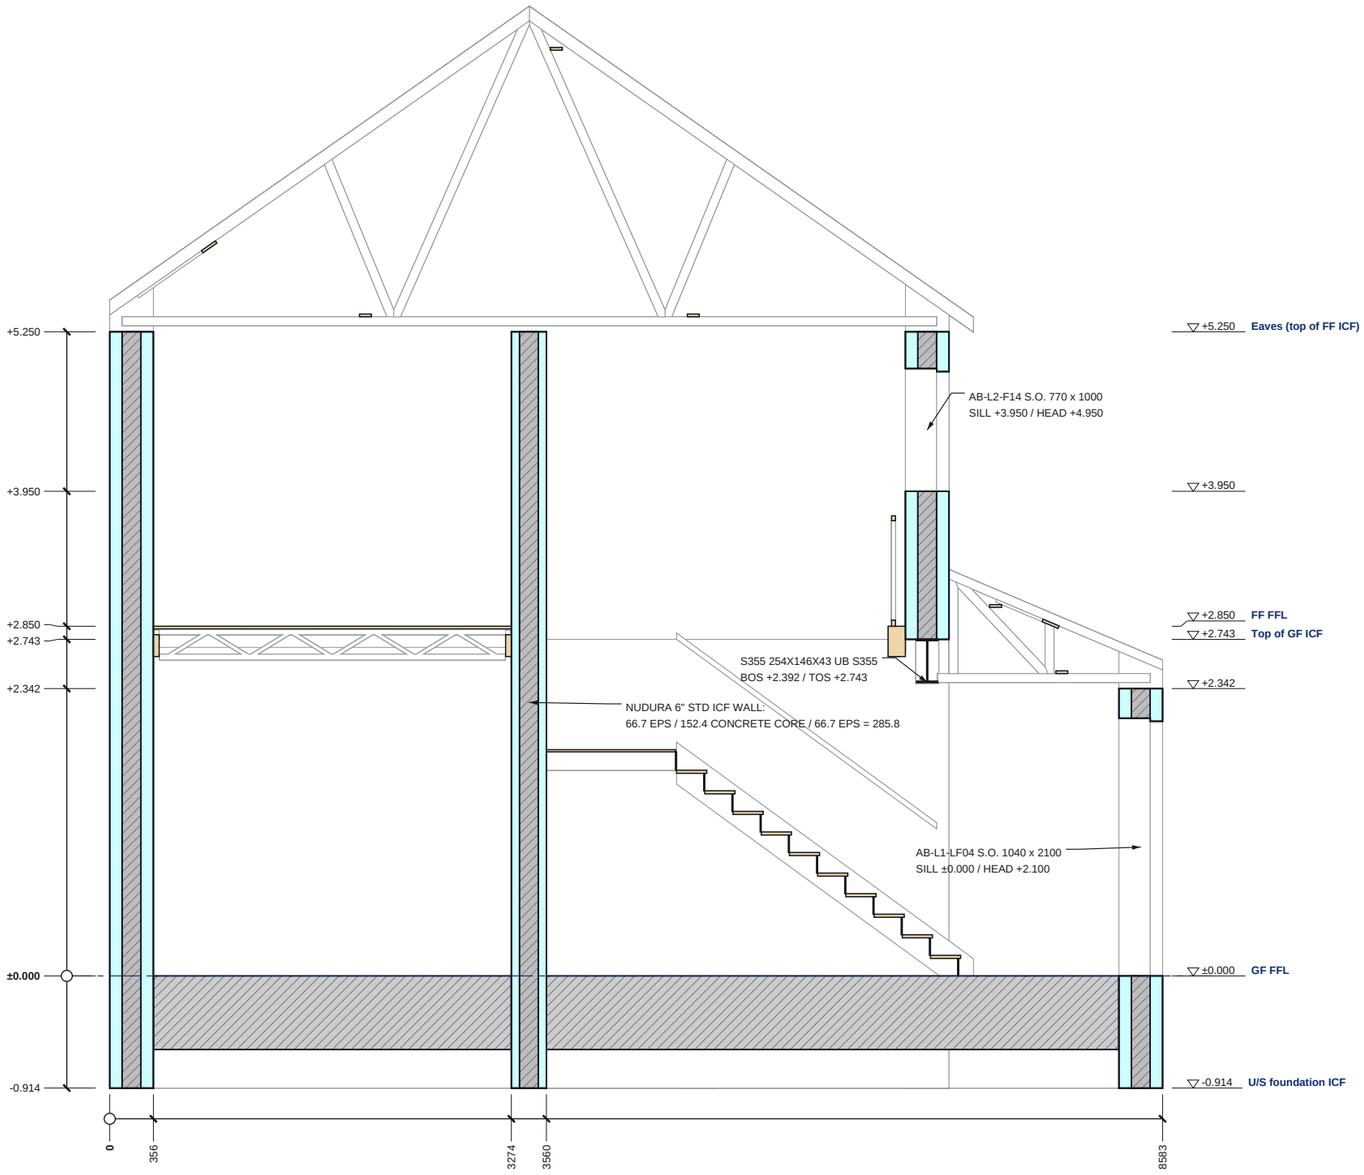

SECTION A-A

Scale 1:50 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2m

SECTION A-A SCHEDULES


LEVELS ON THIS SECTION

Level	FFL
U/S foundation ICF	-0.914
GF FFL	±0.000
top of ICF W06	+2.342
Top of GF ICF	+2.743
FF FFL	+2.850
top of ICF W04	+3.950
Eaves (top of FF ICF)	+5.250

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
S355	254x146x43 UB S355	+2.392	+2.743

SECTION KEY

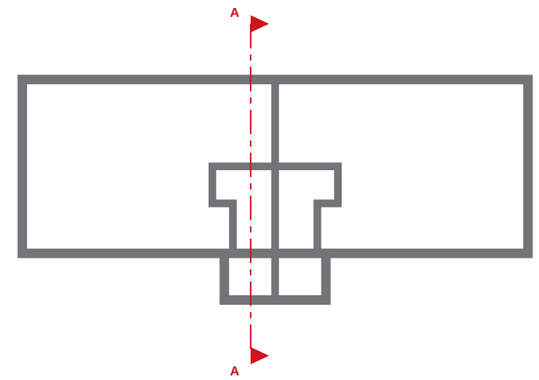

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. No structural design exists yet. ICF per the quotation model: 6in XR35 external walls, 6in Standard party and stair-enclosure walls. The porch steel (UKB 356x171x45 S355 under the first-floor front wall) is TLS-proposed for the engineer's review.
4. Steel marks, BOS / TOS: rev -. See ES26-081-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
Q01	16.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments	Lon Eilian, Caernarfon

DRAWING TITLE
SECTION A-A
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:50	A3	16.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-081-SE-01	Q01

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.